



**PIRNAR®**

AMAZING. AUDACIOUS. ADAMANT.





Keypad Operating Instructions **PIRNAR ART. 6279**

(ver: 01.2016)



## 0. TABLE OF CONTENTS

1. Position of the keypad.....	3
2. Instructions .....	4
3. Programing	
a. Change the admin code .....	5
b. Enter new user code.....	5
c. Delete a user code.....	6
4. User code table .....	7

# 1. POSITION OF THE KEYPAD

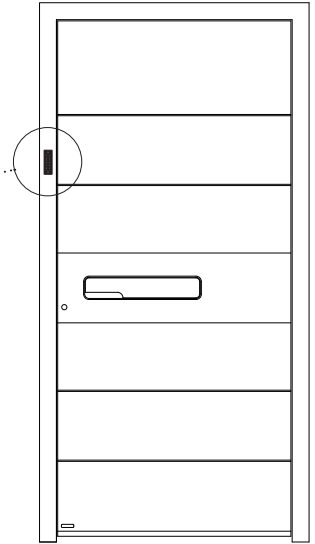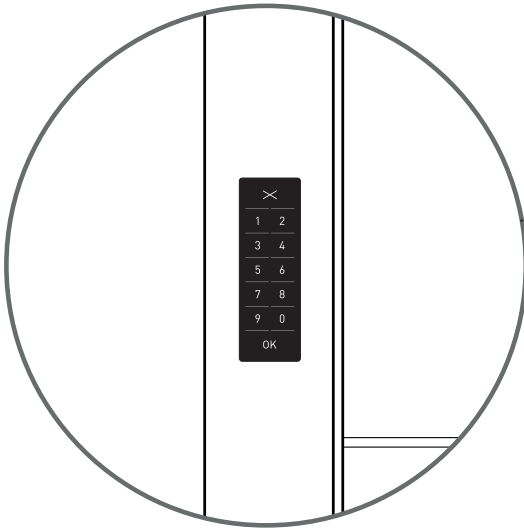

Mounted on **the door frame**.

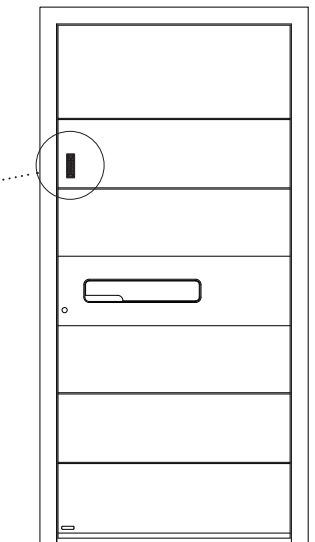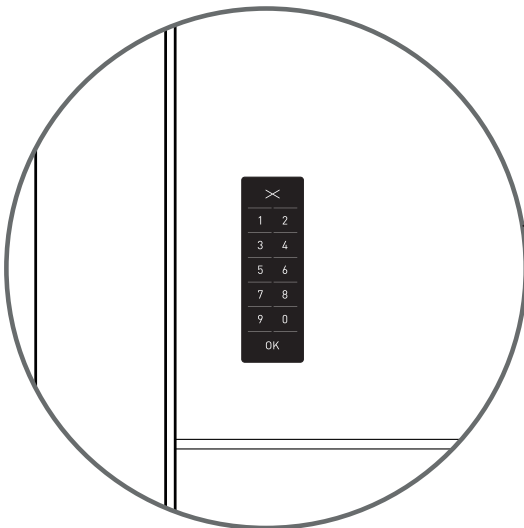

Mounted on **the door**.

## 2. INSTRUCTIONS

*PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE CONNECTING THE KEYPAD TO THE POWER SUPPLY!*

After the door is installed, connection to the supply voltage of 12 V DC has to be carried out by a **competent person**. When connected, the keypad will light up in blue.

The **PIRNAR Art. 6279** keypad is very simple to use. When registering, each user chooses an optional numeric code between 4 and 8 digits.



Symbol X - Escape (clear)

Symbols 0-9 code entry

Symbol OK- confirmation

### 3. PROGRAMING

#### a. CHANGE THE ADMIN CODE

The factory-set admin code is **1234**. We recommend that you change it immediately to your chosen admin code using the attached instructions (see **diagram 1**). You may choose any 4-8 digit number, except for **1234**.

**MAKE SURE THAT YOU STORE THE NEW ADMIN CODE IN A SAFE PLACE!**

diagram 1

**blue light**

1 Press **OK** and hold for 5 seconds

**pink flashing**

2 Enter the admin code (1234) and press **OK**

**pink light**

3 Enter the admin code (1234) again and press **OK**

**green flashing. pink light**

4 Enter the new admin code and press **OK**

**green flashing. pink light**

5 Enter the new admin code again and press **OK**

**green and 3x blue flashing**

Press **X** at anytime to restart the procedure

#### b. ENTER NEW USER CODE

To enter new codes that can be used to open the door along with your personal admin code, please follow the instructions (see **diagram 2**). You can enter up to 100 different user codes.

**WITH REGARD TO THE POTENTIAL DELETION OF USER CODES, WE RECOMMEND ENTERING THE USER CODES IN THE USER CODE TABLE (PAGE 7) AND STORING IT IN THE SAFE PLACE!**

diagram 2

**blue light**

1 press **OK** and hold for 5 seconds

**pink flashing**

2 Enter the admin code and press **OK**

**pink light**

3 Enter the new user code and press **OK**

**green flashing. pink light**

4 Enter the new user code again and press **OK**

**green and blue flashing . pink light**

5 Press **X** too return to standby mode

Press **X** at anytime to restart the procedure


restart the reset of the new user code

## c. DELETE A USER CODE

To delete a user code, please follow the instructions (see **diagram 3**). The admin code cannot be deleted, it can only be changed (see **diagram 1**, page 5).

### diagram 3

**blue light**

1 press  and hold for 5 seconds

**Orange flashing**

2 Enter the admin code and press **OK**

**Orange light**


3 Enter the code you wish to delete and press **OK**

**Green flashing. Orange light**

4 Enter the code you wish to delete again and press **OK**

**Green and red flashing. Orange light**

5 Press  to return to standby mode.

Press  at anytime to restart the procedure

restart the deletion  
of the user code

### MARKINGS AND WARNING SYMBOLS:

The device has two parts: the keypad located in an easily accessible position, and the control module located in a position inaccessible to the user. Access to this part requires the assistance of customer service.

### MAINTENANCE:

The device requires no special maintenance. Clean with non-aggressive cleaning agents or a damp cloth.

**4. USER CODE TABLE**

	USER	CODE
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		

**PIRNAR d.o.o.**

Bravničarjeva ulica 20

SLO - 1000 Ljubljana

Tel: +386 8 205 1210

E-mail : [info@pirnar.si](mailto:info@pirnar.si)

[www.pirnar.co.uk](http://www.pirnar.co.uk)

MADE IN SLOVENIA